

Liftronic® Mobile

The Intelligent Device
for Handling you
can easily move
wherever you need



Advantages

- ✓ One lift assist device available to **suit most electric pallet truck** models on the market
- ✓ **Easy and safe** to move around
- ✓ **Easy interchange of grippers** for handling different types of load
- ✓ **Easy battery replacement**
- ✓ **Versatile:** from mobile to fixed position - very easy with optional base platform

Safety



Acoustic alarm

If the arm is not secured when moving the lift assister, a sensor activates an acoustic alarm



Arm

In case of rope damage a mechanical safety device prevents the arm from lowering



Battery


In case of low battery power, the system allows the arm to be moved to a rest or unload position; a low battery message will then be displayed



Switch-off

In case of accidental switch-off, the system allows arm to be moved to a rest or unload position

Suitable for different load grippers

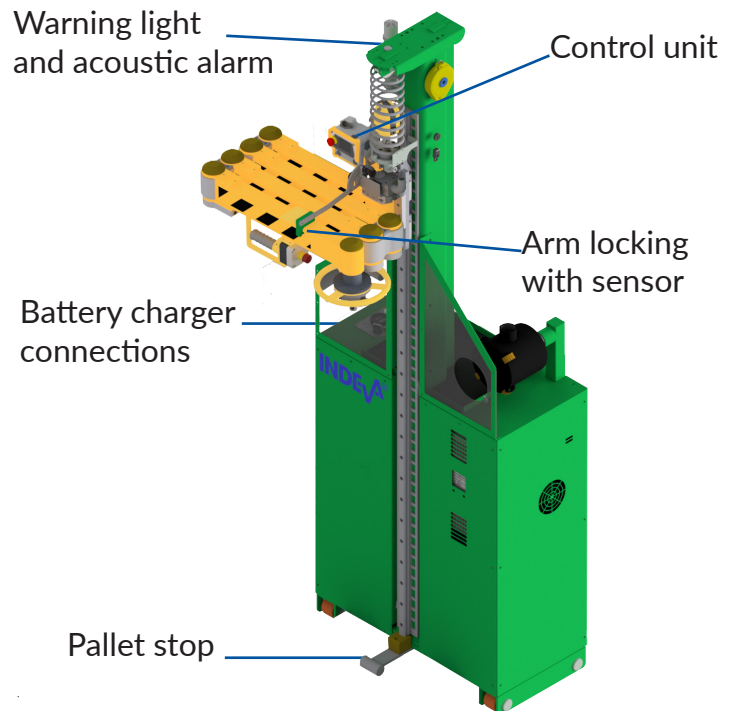

Very agile



Precise




Ergonomic



Zero Gravity


4 JOINTS

3 on the arm + 1 on the gripper coupling

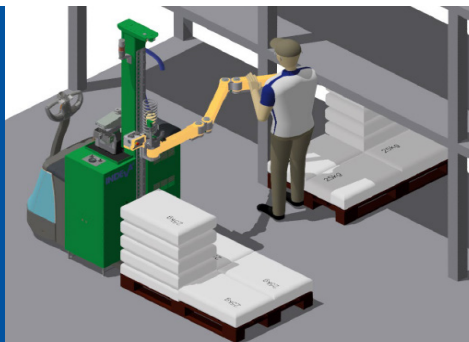


ORIENTATION

On the left or on the right according to the work area side

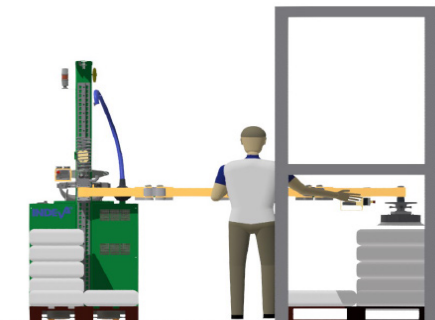

SWIVEL JOINT

On the end of arm for continuous rotation around the gripper axis

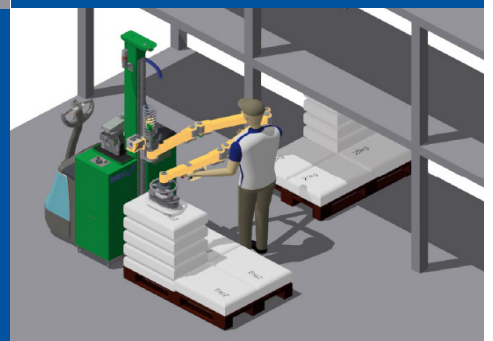

Technical data

- **Gross load capacity:** 50 kg with a mechanical gripper - 25 kg with a vacuum gripper (including gripper)
- **Arm length:** 2530 mm
- **Column height:** 2 choices: 2350 - 2750 mm
- **Vertical stroke:** 1500/1900 mm - based on column height
- **Overall size:** 812 x 851 x 2440/2840 mm (depends on column height)
- **Vacuum gripper:** air through the arm, no pipes